


SPFC-NH-XXM-2/2C

Optic Fiber Splice Closure

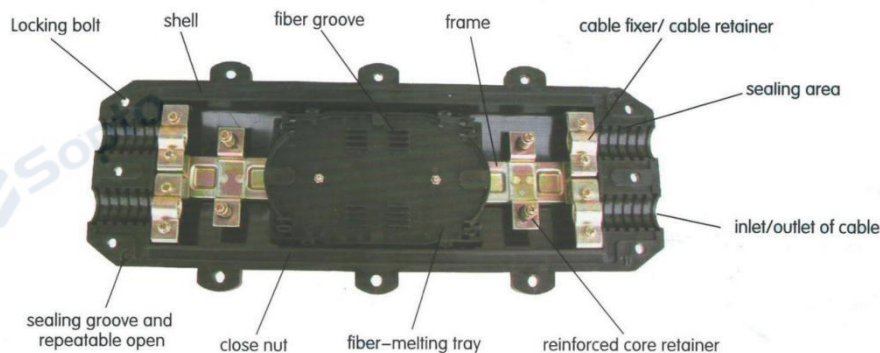

General Description

The product can be applied in the straight line and branch line (one into two, one into three connections of optical cables within the diameter of 22mm(ϕ), all types and structures, when laid overhead, in the pipeline, underground or in the well. Meanwhile, it is also applied to the connection of all-plastic city phone cables.

Features

- All property indexes are in accordance with National YD/T814-2004 Standard.
- The case body is made from imported high-intensity engineering plastics(ABS) and formed the shape with mould plastics under high pressure. It is in the shape of HALF rectangle, with the

advantages of less weight, high mechanical intensity, corrosive-resistance, anti-thunderstruck and long service life.

- The case body and cable entrance are sealed with adhesive rubber strip(non-vulcanized) and sealed tape. Reliable sealing capability. It can be re-opened and easy to maintain.
- Unique disposition of 3 different cable loops($\phi 12.5$, $\phi 17$, $\phi 20$) enables user to choose different outer diameter according to actual conditions, It enhances the reliability of the cable entrance sealed.
- Overlapping fiber-melting tray and separate insulation earth unit make the disposition of the cores, expanding the capacity and cable-earthen flexible, convenient and safe.
- Outer metal component and fixing unit are made of stainless steel, so can be repeatedly used in different environments.

Application

- Telecommunication subscriber loop
- Fiber to the home(FTTH)
- LAN/WAN

Technical Data

Item	Parameter
Type	SPFC-NH-XXM-2/2C
External Size	435 (L) × 190 (W) × 120 (H) mm
Net weight	2.8kg
Cable ports	two cable entry port on each end
Way to install	Aerial, duct and buried applications
Cable diameter	$\varnothing 10$ - $\varnothing 22$
Capacity of splice tray	24 single fiber
Max Capacity of Splice Tray	8
Sealing structure	Sticky cincture
Work Temperature	-40 °C ~+70 °C
Optical fiber winding radius	≥ 40 mm
Extra loss of fiber tray	≤ 0.01 dB
Fiber length left in tray	≥ 1.6 m
Max Capacity	Fiber capacity: single: 96cores, tape-shaped: 192 cores

Lateral pressure-resistance	≥2000N / 10cm
Shock-resistance	≥20N.m

Product Item

Model	Description	Size	Package	Weight/ carton
SPFC-NH-24M-2/2C	Fiber Closure Horizontal type 24 Cores Max , 24 Cores Splice Tray 2 IN 2 OUT Mechanical Splicing type C	435*190*120mm	515*425*575/8 PCS	22.5KG/8pcs
SPFC-NH-48M-2/2C	Fiber Closure Horizontal type 48 Cores Max , 24 Cores Splice Tray 2 IN 2 OUT Mechanical Splicing type C	435*190*120mm		22.5KG/8pcs
SPFC-NH-72M-2/2C	Fiber Closure Horizontal type 72 Cores Max , 24 Cores Splice Tray 2 IN 2 OUT Mechanical Splicing type C	435*190*120mm		22.5KG/8pcs
SPFC-NH-96M-2/2C	Fiber Closure Horizontal type 96 Cores Max , 24 Cores Splice Tray 2 IN 2 OUT Mechanical Splicing type C	435*190*120mm		23.0KG/8pcs
SPFC-NH-144M-2/2C	Fiber Closure Horizontal type 144 Cores Max , 24 Cores Splice Tray 2 IN 2 OUT Mechanical Splicing type C	435*190*120mm		23.0KG/8pcs
SPFC-NH-192M-2/2C	Fiber Closure Horizontal type 192 Cores Max , 24 Cores Splice Tray 2 IN 2 OUT Mechanical Splicing type C	435*190*120mm		23.0KG/8pcs

Operations

- Choose the cable loop with proper outer diameter and let it go through the optical cable. Peel the cable , take off the outer and inner housing, as well as loose contract tube, and wash off the filling grease, leaving 1.1~1.6mfiber and 30~50mm steel core.
- Fix the cable pressing card and cable, together with cable reinforce steel core. If the diameter of the cable is less than 10mm, first bind the cable fixing point with adhesive tape till the diameter has reached 12mm, then fix it.
- Lead the fiber into the melting and connecting tray, fix heat contract tube and heat melt tube to one of the connecting fiber. After melting and connecting the fiber, move heat contract tube and

heat melt tube and fix the stainless (or quartz)reinforce core stick ,make sure the connecting point is in the middle of the housing pipe. Heat the pipe to make the two into one. Put the protected joint into the fiber-laying tray.(one tray can lay 12 cores)

- Lay the left fiber in the melting and connecting tray evenly, and fix the winding fiber with nylon ties. Use the trays from the bottom up. After all the fiber has been connected, cover the top layer and fix it.
- Position it and use the earth wire in accordance with the project plan.
- Sealing the cable retainer nearing the inlet of splice closure and the joint of the cable rings with sealing tape. And close the unused inlets with plugs, with exposed concave parts of the plug sealed with tapes. Then put sealing trips into the sealing groove on the sides of the shell and grease the concave part of inlet of the body between the two parts of the shell. Then close the two parts of the shell and tighten it with stainless steel bolts. The bolts should be screwed tightly with balanced force.
- according to the laying requirement, position and fix the hanging tool .


Packing list

SPFC-NH-24M-2/2C			
Number	Item	Parameter	Quantity
1	joint case main body		1 piece
2	fiber-melting tray		1 piece
3	frame		
4	Melted fiber pack	melting pipe housing	12stick
		stainless reinforced core stick	12stick
		label	“1-48”
		nylon tie	5stick
		sand paper	1strip
5	stainless steel accessories	M5×30 bolt and nut	2 sets
		Hitcher	2 pcs
		M8×25 stainless steel bolt	8 pcs
		M8×35 stainless bolt	2 pcs
		6mm inside hexagon spanner	1pc
6	Plastics accessories kit	Block	2 pcs
		cable loop φ12.5	8 pcs
		cable loop φ17	8pcs
		cable loop φ20	8pcs
		cable loop φ22	8pcs

7	adhesive tape		1coil
8	sealed strip unit		1 piece

Dimensions& Installation Dimensions

Dimensions

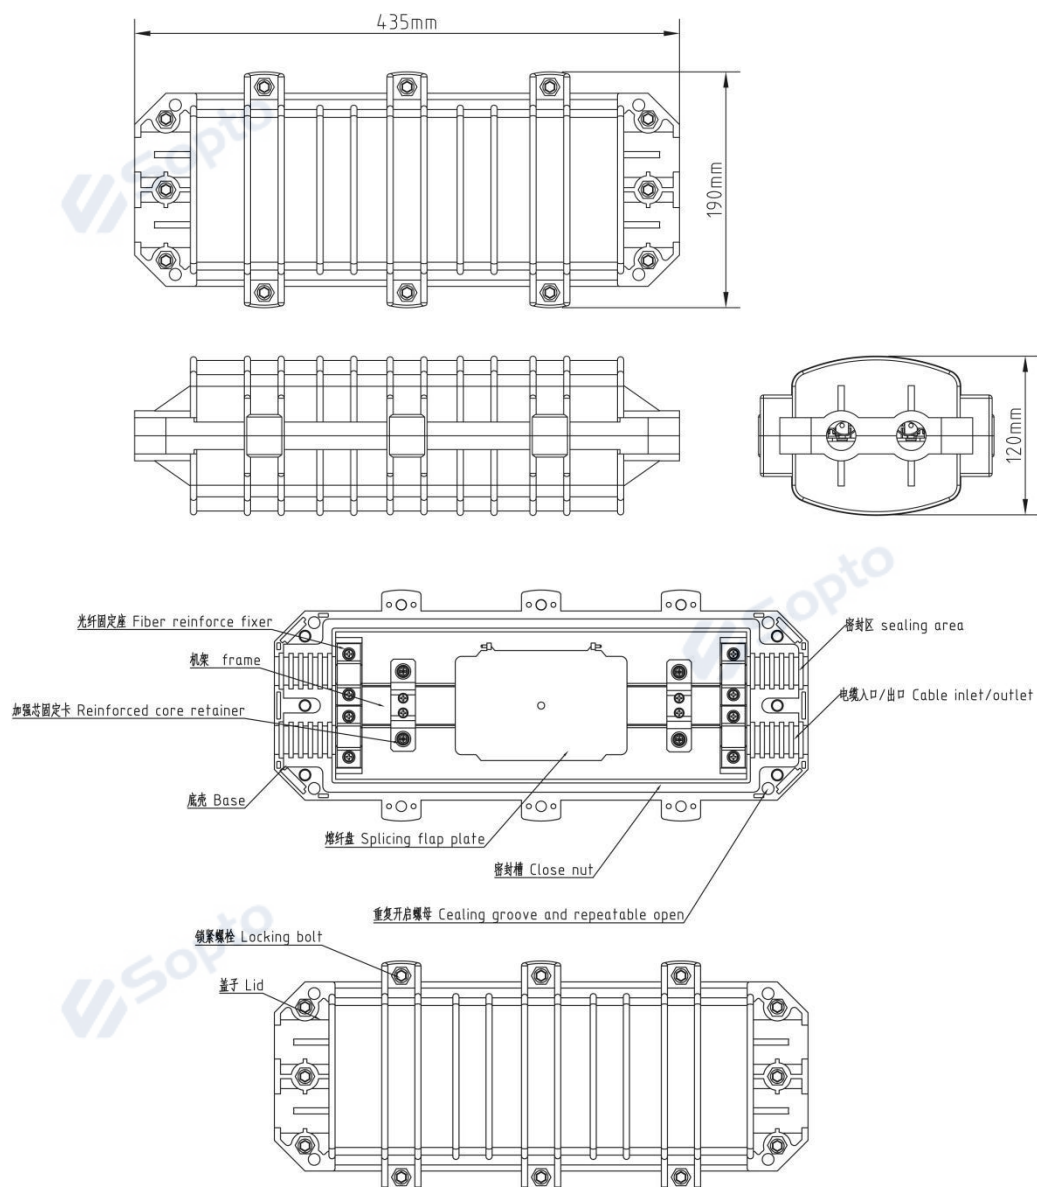

E-mail: sales@sopto.com

Web : <http://www.sopto.com>