


# GJYXFCH

## Cross Section of Cable

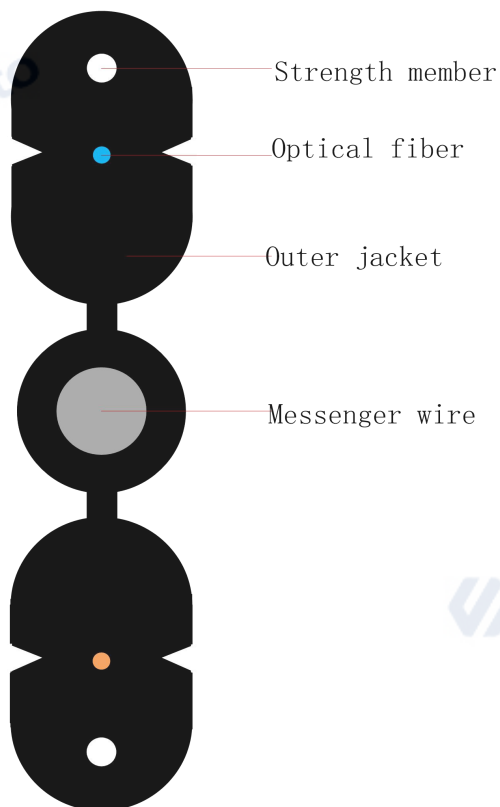

## Optical Fiber Type and Properties

Item	Unit	Specification
Fiber Type		G.652
Mode field diameter	1310nm	$\mu\text{m}$ $9.2 \pm 0.4$
	1550nm	$\mu\text{m}$ $10.4 \pm 0.8$
Cladding diameter	$\mu\text{m}$	$125.0 \pm 1$
Cladding non-circularity	%	$\leq 1.0$
Core/cladding concentricity error	$\mu\text{m}$	$\leq 0.5$
Coating diameter	$\mu\text{m}$	$242 \pm 7$



Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		nm	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤0.4
	1550nm	dB/km	≤0.3
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.652

Item		Unit	Specification
Fiber Type			G.657A1
Mode field diameter	1310nm	μm	8.6-9.5 ± 0.4
Cladding diameter		μm	125.0 ± 0.7
Cladding non-circularity		%	≤1.0
Core/cladding concentricity error		μm	≤0.5
Coating diameter		μm	245 ± 5
Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		nm	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤0.4
	1550nm	dB/km	≤0.3
Macro-bend loss (1 turn, 10mm radius)	1550nm	dB/km	≤0.75
	1625nm	dB/km	≤1.5
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.657

Item		Unit	Specification
Fiber Type			G.657A2
Mode field diameter	1310nm	μm	8.6-9.5 ± 0.4
Cladding diameter		μm	125.0 ± 0.7
Cladding non-circularity		%	≤1.0



Core/cladding concentricity error		μm	≤0.5
Coating diameter		μm	245 ± 5
Coating/cladding concentricity error		μm	≤12
Cable cut-off wavelength		nm	≤ 1260
Attenuation Coefficient	1310nm	dB/km	≤0.4
	1550nm	dB/km	≤0.3
Macro-bend loss (1 turn,7.5mm radius)	1550nm	dB/km	≤0.5
	1625nm	dB/km	≤1.0
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.657

## Dimensions of Cable Constructions

Item		Parameters
Fiber	Color	Blue Orange
	Number of cores	2
Strength member	Material	FRP
	Diameter	0.5mm
Messenger wire	Material	Phosphating steel wire
	Diameter	0.9mm
Outer jacket	Material	LSZH (Oxygen index ≥25%)
	Color	Black
Cable diameter (Rip off the messenger wire)		2.0±0.1mm*3.0±0.1mm
Min. bending radiu (Rip off the messenger wire)	Static	15mm
	Dynamic	30mm
Tensile performance	Short term	600N
Crush	Short term	2200N/100mm



## Working Condition

Item	Standard	Parameters
Operation temperature	IEC 60794-1-2 F1	-5°C ~+50°C

## Drum

Cable type	Drum				
	Height (mm)	Width (mm)	Inner diameter (mm)	Length (km)	Drum type
GJYXFCH	350	275	110	1	Plywood wood drum

Designer: Yang Chengfu 2018/05/22

Approver: Wang Yingli 2018/05/22

Serial number: 20171228-1335