


# GYTS

## Cross Section of Cable

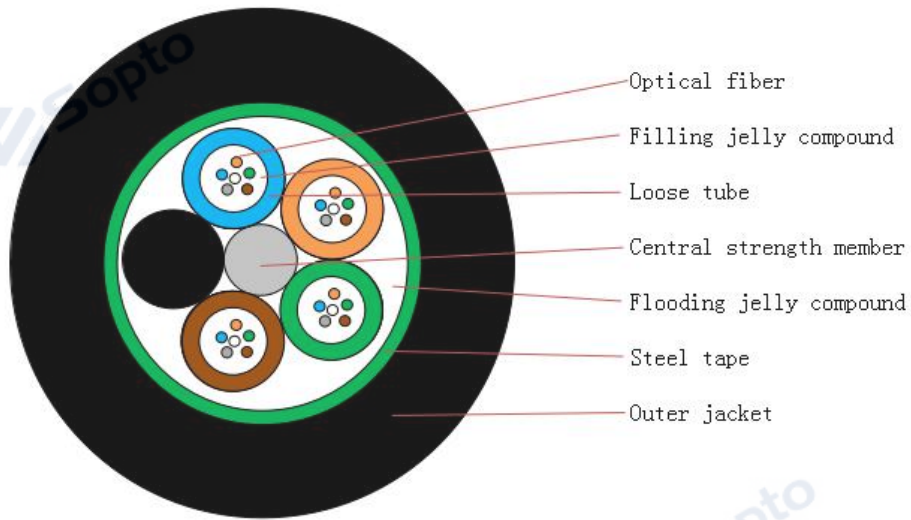

## Optical Fiber Type and Properties

Item	Unit	Specification
Fiber Type		G.652
Mode field diameter	1310nm	$9.2 \pm 0.4$ $\mu\text{m}$
	1550nm	$10.4 \pm 0.8$ $\mu\text{m}$
Cladding diameter	$\mu\text{m}$	$125.0 \pm 1$
Cladding non-circularity	%	$\leq 1.0$
Core/cladding concentricity error	$\mu\text{m}$	$\leq 0.5$
Coating diameter	$\mu\text{m}$	$242 \pm 7$
Coating/cladding concentricity error	$\mu\text{m}$	$\leq 12$
Cable cut-off wavelength	nm	$\leq 1260$
Attenuation Coefficient	1310nm	$\leq 0.36$ dB/km

	1550nm	dB/km	≤0.22
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.652

## Dimensions of Cable Constructions

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter /pad diameter(mm)	Thickness of outer jacket(mm)	Cable diameter (mm)	Cable Weight (kg/km)
4	1+5	4	1.7 ±0.1	1.4/1.4	1.6±0.1	9.0 ±0.5	84
6	1+5	6	1.7 ±0.1	1.4/1.4	1.6±0.1	9.0 ±0.5	84
8	1+5	4	1.7 ±0.1	1.4/1.4	1.6±0.1	9.0 ±0.5	85
12	1+5	6	1.7 ±0.1	1.4/1.4	1.6±0.1	9.0 ±0.5	85
18	1+5	6	1.7 ±0.1	1.4/1.4	1.6±0.1	9.0 ±0.5	85
24	1+5	6	1.7 ±0.1	1.4/1.4	1.6±0.1	9.0 ±0.5	86
30	1+5	6	1.7 ±0.1	1.4/1.4	1.6±0.1	9.0 ±0.5	86
36	1+6	6	1.7 ±0.1	1.8/1.8	1.6±0.1	9.4 ±0.5	100
48	1+5	12	2.0 ±0.1	1.4/1.4	1.6±0.1	9.7 ±0.5	97
60	1+5	12	2.0 ±0.1	1.4/1.4	1.6±0.1	9.7 ±0.5	97
72	1+6	12	2.0 ±0.1	2.0/2.0	1.6±0.1	10.4 ±0.5	124
84	1+7	12	2.0 ±0.1	1.8/2.9	1.6±0.1	11.3 ±0.5	136
96	1+8	12	2.0 ±0.1	1.8/3.5	1.6±0.1	12.0 ±0.5	149
108	1+9	12	2.0 ±0.1	1.8/4.2	1.6±0.1	12.7 ±0.5	165
120	1+10	12	2.0 ±0.1	1.8/4.9	1.6±0.1	13.4 ±0.5	180
132	1+11	12	2.0 ±0.1	1.8/5.5	1.6±0.1	14.0 ±0.5	194
144	1+12	12	2.0 ±0.1	1.8/6.3	1.6±0.1	14.8 ±0.5	213
192	1+6+12	12	2.0 ±0.1	2.2/2.2	1.6±0.1	14.7 ±0.5	225
216	1+6+12	12	2.0 ±0.1	2.2/2.2	1.6±0.1	14.7 ±0.5	226

288	1+9+15	12	2.0 ±0.1	2.2/4.2	1.6±0.1	16.7 ±0.5	284
-----	--------	----	----------	---------	---------	-----------	-----

## Cable Performance

Item		Parameters
Loose tube	Material	PBT
	Color	Full color spectrum
Filler	Material	PE
	Color	Black
CSM	Material	Phosphating steel wire
Armoured	Material	Plastic coated steel strip
Outer jacket	Material	MDPE
	Color	Black
Min. bending radius	Static	10 times cable diameter
	Dynamic	20 times cable diameter
Repeating bending	Load: 150N;number of cycles:30 No obvious addition attention, no fiber break and no cable damage.	
Tensile performance	Short term	1500N
Crush	Short term	1000N/100mm
Torsion	Load: 150N; number of cycles:10; twist angle: ± 180° No obvious addition attention, no fiber break and no cable damage.	
Impact	Impact energy: 450g× 1m; radius of hammer head:12.5mm; number of impact: 5 No obvious addition attention, no fiber break and no cable damage.	

## Working Condition

Item	Standard	Parameters
Operation temperature	IEC 60794-1-2 F1	-20℃~+60℃
Water penetration	IEC 60794-1-2-F5	Water level: 1m ,sample: 3m, After 24h, no water ingress.

## Drum

Cable type	Drum		
	Height	Width	Inner diameter
GYTS - 4B1	750mm	760mm	350mm
GYTS - 6B1	750mm	760mm	350mm
GYTS - 8B1	750mm	760mm	350mm
GYTS - 12B1	750mm	760mm	350mm
GYTS - 18B1	750mm	760mm	350mm
GYTS - 24B1	750mm	760mm	350mm
GYTS - 30B1	750mm	760mm	350mm
GYTS - 36B1	800mm	760mm	400mm
GYTS - 48B1	800mm	760mm	400mm
GYTS - 60B1	800mm	760mm	400mm
GYTS - 72B1	850mm	760mm	400mm
GYTS - 84B1	900mm	760mm	400mm
GYTS - 96B1	950mm	760mm	400mm
GYTS - 108B1	950mm	760mm	400mm
GYTS - 120B1	1000mm	760mm	400mm
GYTS - 132B1	1100mm	760mm	400mm
GYTS - 144B1	1100mm	760mm	400mm
GYTS - 192B1	1100mm	760mm	400mm
GYTS - 216B1	1100mm	760mm	400mm
GYTS - 288B1	1250mm	760mm	500mm

Designer: Wang Yingli 2017/08/20  
 Approver: Zhang Honglei 2017/08/20  
 Serial number: 20170808-815

E-mail: [sales@sopto.com](mailto:sales@sopto.com)

Web : <http://www.sopto.com>