


ADSS

Cross Section of Cable

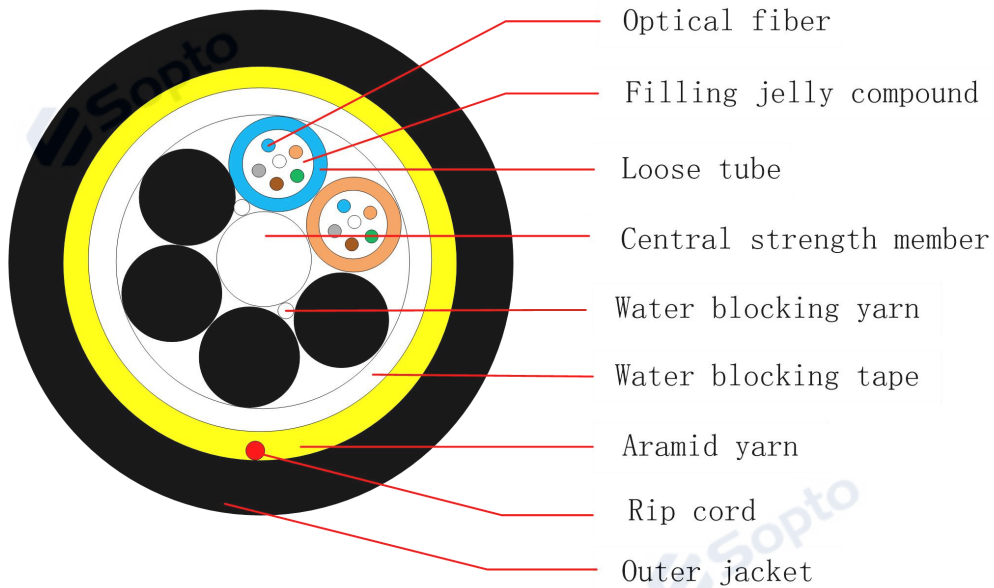

Optical Fiber Type and Properties

Item	Unit	Specification
Fiber Type		G.652
Mode field diameter	1310nm	μm 9.2 ± 0.4
	1550nm	μm 10.4 ± 0.8
Cladding diameter	μm	125.0 ± 1
Cladding non-circularity	%	≤ 1.0
Core/cladding concentricity error	μm	≤ 0.5
Coating diameter	μm	242 ± 7
Coating/cladding concentricity error	μm	≤ 12
Cable cut-off wavelength	nm	≤ 1260
Attenuation Coefficient	1310nm	dB/km ≤ 0.36

	1550nm	dB/km	≤0.22
Proof stress level		kpsi	≥100

Note: Other parameters meet standard ITU-T G.652

Dimensions of Cable Constructions

Fiber count	Structure	Fibers per tube	Loose tube diameter (mm)	CSM diameter /pad diameter(mm)	Thickness of outer jacket(mm)	Cable diameter (mm)	Cable Weight (kg/km)
6	1+6	6	2.0±0.1	2.2/2.2	1.7±0.1	10.3±0.5	79
12	1+6	6	2.0±0.1	2.2/2.2	1.7±0.1	10.3±0.5	80
24	1+6	6	2.0±0.1	2.2/2.2	1.7±0.1	10.3±0.5	81
48	1+6	12	2.2±0.1	2.4/2.4	1.7±0.1	10.9±0.5	90

Cable Performance

Item		Parameters		
Loose tube	Material	PBT		
	Color	Full color spectrum		
Filler	Material	PE		
	Color	Black		
CSM	Material	FRP		
Non-metal reinforced pieces	Material	Aramid yarn		
Outer jacket	Material	MDPE		
	Color	Black		
Min. bending radius	Static	10 times cable diameter		
	Dynamic	20 times cable diameter		
Repeating bending	Load: 150N; number of cycles: 30, no obvious addition attention, no fiber break and no cable damage.			
Tensile performance	Core	RTS (N)	MAT (N)	EDS (N)

	6	5600	2500	1400
	12	5600	2500	1400
	24	5600	2500	1400
	48	6000	2700	1500
Crush	Short term	1000N/100mm		
Torsion	Load: 150N; number of cycles:10; twist angle: $\pm 180^\circ$ No obvious addition attention, no fiber break and no cable damage.			
Impact	Impact energy: 450g*1m; radius of hammer head: 12.5mm; number of impact: 5 No obvious addition attention, no fiber break and no cable damage.			

Working Condition

Item	Standard	Parameters
Operation temperature	IEC 60794-1-2 F1	-20°C ~ +60°C
Water penetration	IEC 60794-1-2-F5	Water level: 1m ,sample: 3m, After 24h, no water ingress.

Drum

Cable type	Drum			Length(km)
	Height (mm)	Width (mm)	Inner diameter (mm)	
ADSS-6B1	850	760	400	2
ADSS-12B1	850	760	400	2
ADSS-24B1	850	760	400	2
ADSS-48B1	900	760	400	2

Designer: Yu Wenshuang 2017/12/02
 Approver: Zhang Honglei 2017/12/02
 Serial number: 20171202-1246